



## **Trout River Live Bottom**

## 37' Tri Axle Live Bottom


## **Standard Specifications**

- Overall Height 10' (120")
- Overall Length 37' (444")
- Axle Spread 60"
- King Pin Setting 18"
- King Pin Height 50"
- RTAC Compliant Yes
- Wall Height 55"
- Body Capacity 41.6 Cubic Yards
- Tare Weight 18,940LBS
- AR 450 Rounded Tub Increased Volume, Lower Center of Gravity

- Conveyor Control Valve Forward/Reversing with Auto Belt Feature
- Bolted 100KSI Formed C Channel Cross Bars Easy Replacement
- Poly Fenders
- Suspension INTRAAX AA250 Air Ride 25,000LB Capacity Per Suspension
- Tub is Bolted to Suspension For Less Wear And Stress
- Wheel Machined Aluminum With Light Weight Hubs And Drums.
- Tires 11R X 22.5 Cooper Road Master RM230HH
- ABS 2 Sensor System, 1 Module
- Tool Box Included
- LED Lighting System
- Mid Section Conveyor Inspection Door
- Holland Mark V 2 Speed Landing Gear





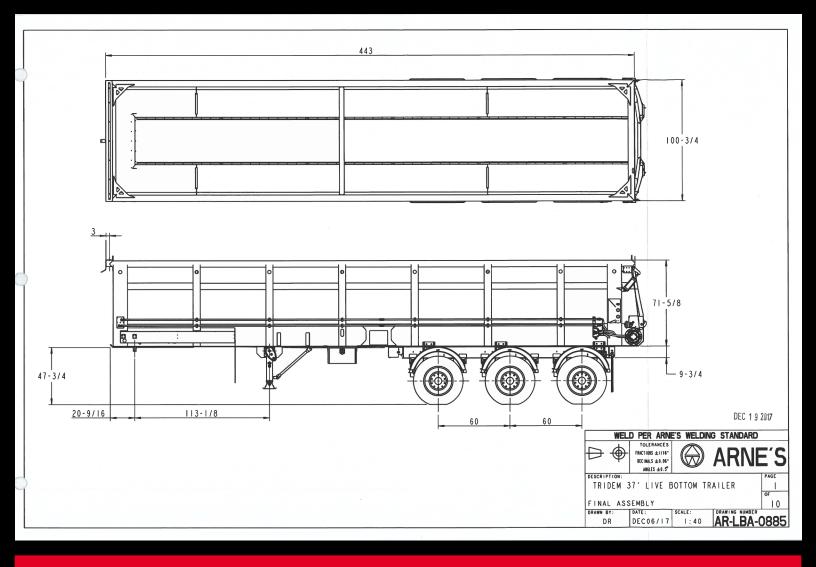

## **Available Options**

- 1 Axle Auto Deploy Lift Kit
- Asphalt Chute Attachment
- Grain Chute Attachment
- Spreader Attachment
- Shoulder Attachment
- High Arch Electric Neoprene Tarp
- High Arch Electric Mesh Tarp
- High Lift Tailgate
- Aux. LED Work Lights
- 11R24.5 Tires, With Machined Aluminum Rims
- Disc Brakes
- Hubodometer Drivers Side
- Height Extensions
- 30K Heavy Duty Axles
- Stainless Fenders
- Release Agent Tank
- Grain Door and Comp. Locks
- Additional Ladders
- Removable Ladder For Rear Storage Compartment
- Flow Controls
- Aluminum Insulated Panels
- Stripe Package